


Customised configuration of your own rack

- 1 Determine basic frame dimensions (width, height, depth)
- 2 Select doors, (19") mounting angles, side panels and plinth
- 3 Choose top cover panel
- 4 Choose bottom cover panel

Completely assembled to your specifications, the rack will be delivered in the shortest possible time.
 IS-1 system accessories (from page 66)
 General system accessories (from page 88)

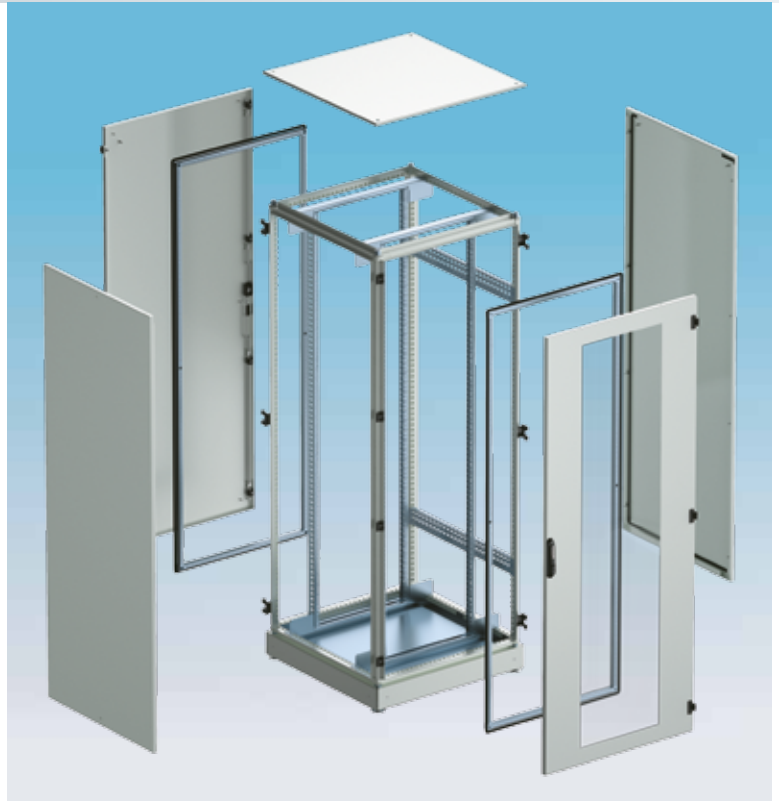

IP55 rating

1 Basic frame, 600 mm wide

Basic frame	506612605	506612805	506612905	506611005	506618905	506618105	506620605	506620805	506620905	506621005	506622105	506621205	506622125
Width (mm)	600	600	600	600	600	600	600	600	600	600	600	600	600
Height (mm)	1,200	1,200	1,200	1,200	1,800	1,800	2,000	2,000	2,000	2,000	2,200	2,000	2,200
Depth (mm)	600	800	900	1,000	900	1,000	600	800	900	1,000	1,000	1,200	1,200
Height (U)	25	25	25	25	38	38	43	43	43	43	47	43	47
Colour, light grey RAL 7035	6007035	6007035	6007035	6007035	6007035	6007035	6007035	6007035	6007035	6007035	6007035	6007035	6007035
Colour, black RAL 9005 – fine structure	6009005	6009005	6009005	6009005	6009005	6009005	6009005	6009005	6009005	6009005	6009005	6009005	6009005
Basic framework	506612605	506612805	506612905	506611005	506618905	506618105	506620605	506620805	506620905	506621005	506622105	506621205	506622125

2 Doors, 482.6 mm (19") mounting angles, side panels and plinth

Glazed door, single-wing, with 3 mm single pane safety glass (SPSG)	506980505	506980505	506980505	506980505	506982505	506982505	506983505	506983505	506983505	506983505	506935505	506983505	506935505
Sheet steel door, single wing, solid	506985005	506985005	506985005	506985005	506987005	506987005	506988005	506988005	506988005	506988005	506936505	506988005	506936505
Glazed door, double wing, with 3 mm SPSG							506756005	506756005	506756005	506756005	506759005	506756005	506759005
Sheet steel door with passive ventilation	506989005	506989005	506989005	506989005	506994005	506994005	506989505	506989505	506989505	506989505	506937505	506989505	506937505
482.6 mm (19") mounting angle, front	506783505	506783505	506783505	506783505	506784505	506784505	506785005	506785005	506785005	506785005	506780505	506785005	506780505
482.6 mm (19") mounting angle, front and rear	506783515	506783515	506783515	506783515	506784515	506784515	506785015	506785015	506785015	506785015	506780515	506785015	506780515
Cross support for 482.6 mm 1 x (19") mounting angles	506727005	506727005	506727005	506727005	506727005	506727005	506727005	506727005	506727005	506727005	506727005	506727005	506727005
Mounting bracket for 482.6 mm 2 x (19") mounting angles	506728005	506728005	506728005	506728005	506728005	506728005	506728005	506728005	506728005	506728005	506728005	506728005	506728005
System struts for 482.6 mm (19") mounting angles (4)	506741005	506742005	506742515	506744005	506742515	506744005	506741005	506742005	506742515	506744005	506744005	506745005	506745005
IP20 side panel (1)	506731005	506932005	506736005	506733005	506734005	506934105	506735005	506935005	506737005	506739005	506738105	506740005	506741065
Optional: with sash-fastener set (1)	506790605	506790605	506790605	506790605	506790605	506790605	506790605	506790605	506790605	506790605	506790605	506790605	506790605
IP55 side panel (1)	506732005	506932006	506736006	506733006	506734006	506782006	506735006	506735006	506737006	506739006	506742006	506740006	506741066
Screw fastened side panel (1)	506732005	506932006	506736006	506733006	506734006	506782006	506735006	506735006	506737006	506739006	506742006	506740006	506741066
Plinth, with passive ventilation, levelling feet, height 100 mm	506721005	506722005	506726005	506722505	506726005	506722505	506721005	506722005	506726005	506722505	506722505	506728505	506728505
Plinth, solid, with levelling feet, height 100 mm	506723005	506724005	506725005	506723505	506725005	506723505	506723005	506724005	506725005	506723505	506723205	506727505	506727505

SCHÄFER IS-1 – configurator for 600 mm racks



Sheet steel door,
single wing, closed



Sheet steel door,
double wing, closed



Glazed door, single
wing, with 3 mm SPSSG



Glazed door, double
wing, with 3 mm SPSSG



Sheet steel door,
single wing,
passive ventilation
(honeycomb perforation,
81% open area)

3 Top cover panels



IP55, one-piece,
solid

Depth	Width 600
600	506705015
800	506715015
900	506720015
1,000	506710016
1,200	506740015



Two-piece, prepared for
cable brush (supplied)
and 6 knockouts for fans

Depth	Width 600
600	506705065
800	506715065
900	506720065
1,000	506720125
1,200	506720255



Two-piece, prepared for
cable brush (supplied)
and large fan

Depth	Width 600
600	–
800	506715085
900	506720055
1,000	506706105
1,200	506706305

4 Bottom cover panels



Multi-piece,
solid
(brush supplied)

Depth	Width 600
600	506615055
800	506615085
900	506620055
1,000	506606105
1,200	506606205