

## Customised configuration of your own rack

- 1 Determine basic frame dimensions (width, height, depth)
- 2 Select doors, (19") mounting angles, side panels and plinth
- 3 Choose top cover panel
- 4 Choose bottom cover panel


Completely assembled to your specifications, the rack will be delivered in the shortest possible time.

IS-1 system accessories (from page 66)

General system accessories (from page 88)



IP55 rating

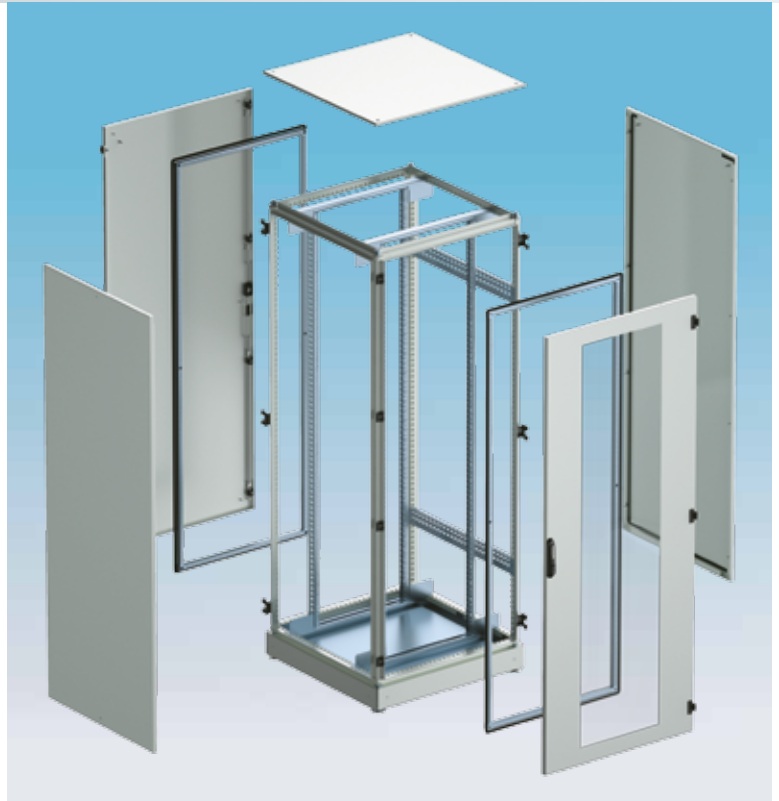

### 1 Basic frame, 700 mm wide

Basic frame	506521005	506521205	506522005	506522205
Width (mm)	700	700	700	700
Height (mm)	2,000	2,000	2,200	2,200
Depth (mm)	1,000	1,200	1,000	1,200
Height (U)	43	43	47	47
Colour, light grey RAL 7035	6007035	6007035	6007035	6007035
Colour, black RAL 9005 – fine structure	6009005	6009005	6009005	6009005
Basic framework	506521005	506521205	506522005	506522205

### 2 Doors, 482.6 mm (19") mounting angles, side panels and plinth

Glazed door, single wing, with 3 mm SPSG	506583505	506583505	506535505	506535505
Sheet steel door, solid	506588005	506588005	506537005	506537005
Sheet steel door with passive ventilation	506594505	506594505	506595505	506595505
482.6 mm (19") mounting angle, front	506785005	506785005	506780505	506780505
482.6 mm (19") mounting angle, front and rear	506785015	506785015	506780505	506780505
Cross support for 482.6 mm 1 x (19") mounting angles, asymmetrical	506943315	506943315	506943415	506943415
Mounting bracket for 482.6 mm 2 x (19") mounting angles, asymmetrical	506943325	506943325	506943425	506943425
System struts for 482.6 mm (19") mounting angles (4) for asymmetrical installation (please order both article numbers)	506744005	506745005	506744005	506745005
	506946305	506946405	506946305	506946405
IP20 side panel (1)	506739005	506740005	506738105	506741065
Optional: with sash-fastener set (1)	506790605	506790605	506790605	506790605
IP55 side panel (1)	506739006	506740006	506742006	506741006
Plinth, with passive ventilation, levelling feet, height 100 mm	506522505	506521505	506522505	506521505
Plinth, solid, with levelling feet, height 100 mm	506523505	506524505	506523505	506524505

# SCHÄFER IS-1 – configurator for 700 mm racks



Sheet steel door,  
single wing, solid



Sheet steel door,  
double wing, solid



Glazed door, single  
wing, with 3 mm SPSPG



Glazed door, double  
wing, with 3 mm SPSPG



Sheet steel door,  
single wing,  
passive ventilation  
(honeycomb perforation,  
81% open area)

## 3 Top cover panels



IP55, one-piece,  
solid

Depth	Width 700
1,000	506530015
1,200	506540015



One-piece, prepared for  
cable brush (supplied)  
and 6 knockouts for  
fans

Depth	Width 700
1,000	506520125
1,200	506520225

## 4 Bottom cover panels



Multi-piece,  
solid  
(brush supplied)

Depth	Width 700
1.000	506506405
1.200	506506305

