


Customised configuration of your own rack

- 1 Determine basic frame dimensions (width, height, depth)
- 2 Select doors, (19") mounting angles, side panels and plinth
- 3 Choose top cover panel
- 4 Choose bottom cover panel

Completely assembled to your specifications, the rack will be delivered in the shortest possible time.

IS-1 system accessories (from page 66)
General system accessories (from page 88)

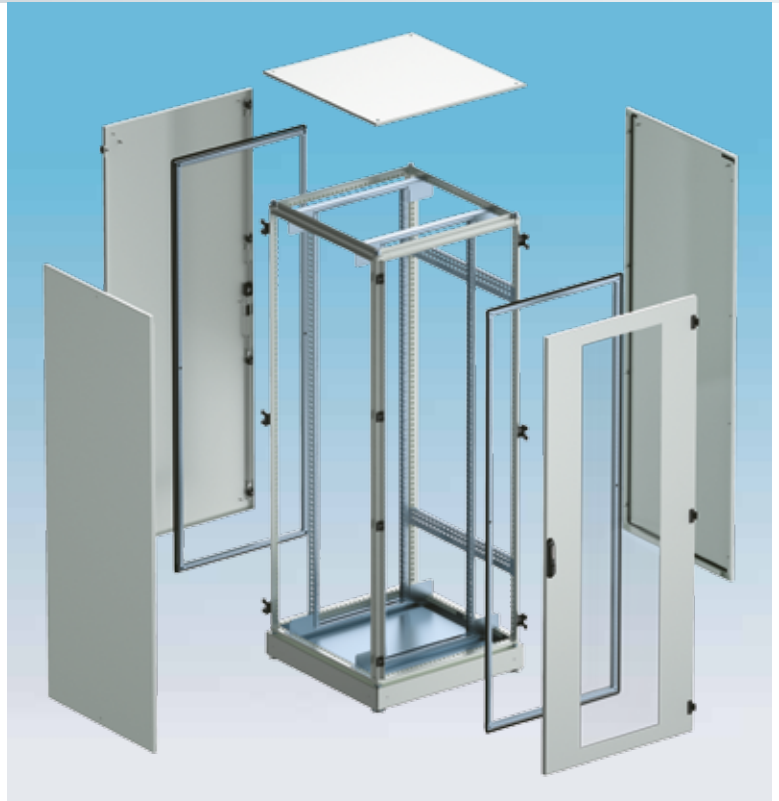

IP55 rating

1 Basic frame, 800 mm wide

Basic frame	506812605	506812805	506812905	506812105	506818805	506818905	506818105	506820805	506820905	506821005
Width (mm)	800	800	800	800	800	800	800	800	800	800
Height (mm)	1,200	1,200	1,200	1,200	1,800	1,800	1,800	2,000	2,000	2,000
Depth (mm)	600	800	900	1,000	800	900	1,000	800	900	1,000
Height (U)	25	25	25	25	38	38	38	43	43	43
Colour, light grey RAL 7035	6007035	6007035	6007035	6007035	6007035	6007035	6007035	6007035	6007035	6007035
Colour, black RAL 9005 – fine structure	6009005	6009005	6009005	6009005	6009005	6009005	6009005	6009005	6009005	6009005
Basic framework	506812605	506812805	506812905	506812105	506818805	506818905	506818105	506820805	506820905	506821005

2 Doors, 482.6 mm (19") mounting angles, side panels and plinth

Glazed door, single wing, with 3 mm SPSPG	506981005	506981005	506981005	506981005	506983005	506983005	506983005	506984005	506984005	506984005
Sheet steel door, single wing, solid	506985505	506985505	506985505	506985505	506987505	506987505	506987505	506988505	506988505	506988505
Sheet steel door, double wing, solid	506955005	506955005	506955005	506955005				506958005	506958005	506958005
Glazed door, double wing, with 3 mm SPSPG								506958505	506958505	506958505
Sheet steel door, double wing, passive ventilation (honeycomb perforation, 81% open area)								506956505	506956505	506956505
Sheet steel door, single wing, passive ventilation (honeycomb perforation, 81% open area)	506993005	506993005	506993005	506993005	506995005	506995005	506995005	506994505	506994505	506994505
482.6 mm (19") mounting angle, front	506783505	506783505	506783505	506783505	506784505	506784505	506784505	506785005	506785005	506785005
482.6 mm (19") mounting angle, front and rear	506783515	506783515	506783515	506783515	506784515	506784515	506784515	506785015	506785015	506785015
38/47 U cross support for 482.6 mm 1 x (19") angle					506943305	506943305	506943305	506943305	506943305	506943305
38/47 U cross support for 482.6 mm 2 x (19") angles					506943505	506943505	506943505	506943505	506943505	506943505
25/43 U cross support for 482.6 mm 1 x (19") angles	506943205	506943205	506943205	506943205						
25/43 U cross support for 482.6 mm 2 x (19") angles	506943215	506943215	506943215	506943215						
System strut for 482.6 mm (19") angles (4)	506941005	506952005	506953005	506954005	506952005	506953005	506954005	506952005	506953005	506954005
IP20 side panel (1)	506732005	506932005	506736005	506733005	506934005	506734005	506934105	506935005	506737005	506739005
Optional: with sash-fastener set (1)	506790605	506790605	506790605	506790605	506790605	506790605	506790605	506790605	506790605	506790605
IP55 side panel (1)	506741006	506932006	506736006	506733006	506934006	506734006	506734106	506935006	506737006	506739006
Plinth, with passive ventilation, levelling feet, height 100 mm	506921005	506922005	506926005	506922505	506922005	506926005	506922505	506922005	506926005	506922505
Plinth, solid, with levelling feet, height 100 mm	506923005	506924005	506925005	506923505	506924005	506925005	506923505	506924005	506925005	506923505
Plinth, with passive ventilation, levelling feet, height 200 mm		506922205	506926205	506928205	506922205	506926205	506928205	506922205	506926205	506928205
Plinth, solid, with levelling feet, height 200 mm		506925205	506923205	506923205	506924205	506925205	506923205	506924205	506925205	506923205

SCHÄFER IS-1 – configurator for 800 mm racks



Sheet steel door,
single wing, solid



Sheet steel door,
double wing, solid



Glazed door, single
wing, with 3 mm SPSSG



Glazed door, double
wing, with 3 mm SPSSG



Sheet steel door,
single wing,
passive ventilation
(honeycomb perforation,
81% open area)

506823005	506822805	506822005	506822205
800	800	800	800
2,000	2,200	2,200	2,200
1,200	800	1,000	1,200
43	47	47	47
6007035	6007035	6007035	6007035
6009005	6009005	6009005	6009005
506823005	506822805	506822005	506822205

3 Top cover panels



IP55, one-piece,
solid

Depth	Width 800
600	506905015
800	506915015
900	506920015
1,000	506930015
1,200	506940015



Two-piece, prepared for
cable brush (supplied)
and 6 knockouts for fans

Depth	Width 800
600	506905065
800	506915065
900	506920065
1,000	506920125
1,200	506920225



Two-piece, prepared for
cable brush (supplied)
and large fan

Depth	Width 800
600	-
800	506915085
900	506920055
1,000	506906205
1,200	506906305

506984005	506936005	506936005	506936005
506988505	506937005	506937005	506937005
506958005	506959005	506959005	506959005
506958505	506956005	506956005	506956005
506956505	506958055	506958055	506958055
506994505	506938005	506938005	506938005
506785005	506780505	506780505	506780505
506785015	506780515	506780515	506780515
506943305			
506943505			
	506943205	506943205	506943205
	506943215	506943215	506943215
506954505	506952005	506954005	506954005
506740005	506738005	506738105	506741065
506790605	506790605	506790605	506790605
506740006	506738006	506742006	506741005
506921505	506922005	506922505	506921505
506924505	506924005	506923505	506924505
506921205	506922205	506928205	506921205
506927205	506924205	506923205	506927205

4 Bottom cover panels



Multi-piece,
solid
(brush supplied)

Depth	Width 800
600	506815055
800	506815085
900	506820055
1,000	506806205
1,200	506806305